


小型浮球液位開關


◆ 塑膠單點式 水平安裝

型號: LS6-ABS-4NPT-SI

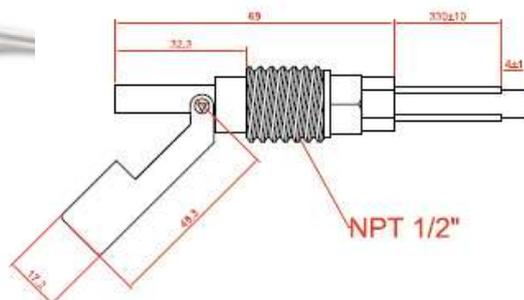


- 消耗功率: 10W (Max.)
- 切換電流: 0.5 Amps DC(Max.)
- 極限電流: 1.0 Amps DC(Max.)
- 切換電壓: 200 VDC(Max.)
- 螺 牙: NPT 1/2"
- 材 質: ABS

型號: LS6-PP-4NPT-SI

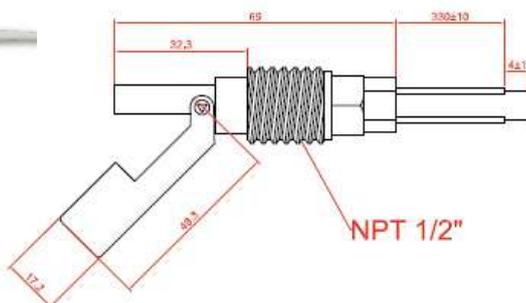

- 消耗功率: 10W (Max.)
- 切換電流: 0.5 Amps DC(Max.)
- 極限電流: 1.0 Amps DC(Max.)
- 切換電壓: 200 VDC(Max.)
- 螺 牙: NPT 1/2"
- 材 質: PP


型號: LS6-PVDF-4NPT-SI

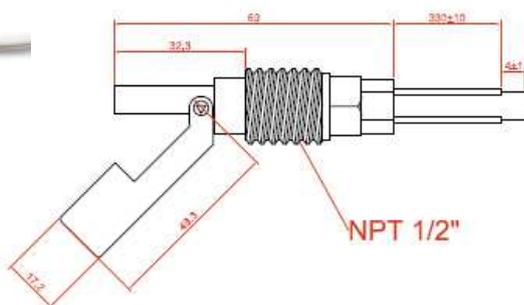

- 消耗功率: 10W (Max.)
- 切換電流: 0.5 Amps DC(Max.)
- 極限電流: 1.0 Amps DC(Max.)
- 切換電壓: 200 VDC(Max.)
- 螺 牙: NPT 1/2"
- 材 質: PVDF

◆ 不銹鋼單點式 水平安裝

型號: LS6-SUS304-4NPT-SI

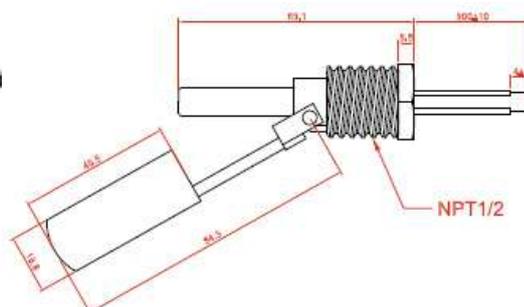

- 消耗功率: 70W (Max.)
- 切換電流: 1.0A DC(Max.)
- 極限電流: 1.75A DC(Max.)
- 切換電壓: 200 VDC(Max.)
- 螺 牙: NPT 1/2"
- 材 質: 不銹鋼 SUS304