

面積式流量計 PC/PSU 本體 附警報開關

型號:SF300

規格

- ◆ 適用流體：液體 & 油
- ◆ 材質：本體 — PC ; PSU
墊圈 — Viton
浮球 — PPS
彈簧 — 不銹鋼 SS316
- ◆ 接續口材質：不銹鋼 SS316
- ◆ 接續口徑：3/8", 1/2", 3/4" NPT 母牙
- ◆ 操作溫度：PC 本體 -10°C ~ +60°C
PSU 本體 -10°C ~ +110°C
- ◆ 操作壓力：max.1.2 MPa (12 kg/cm²)
- ◆ 精確度：滿刻度的 5%
- ◆ 安裝型式：直立, 底進頂出；頂進底出
水平, 左進右出；右進左出
- ◆ 警報開關：A 接點 N.O.單點/雙點
(設定點位置須位於全刻度的 10%~80%之間)
- ◆ 額定電流：AC125V 0.5A / DC100V 10W / Max. DC250V < 40mA
- ◆ 重量：0.3~0.4 kg





一般型




固定型

外觀尺寸

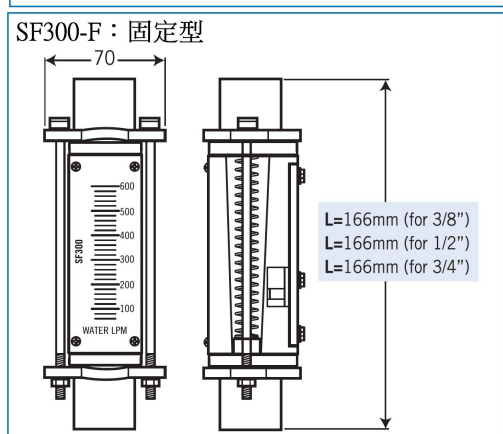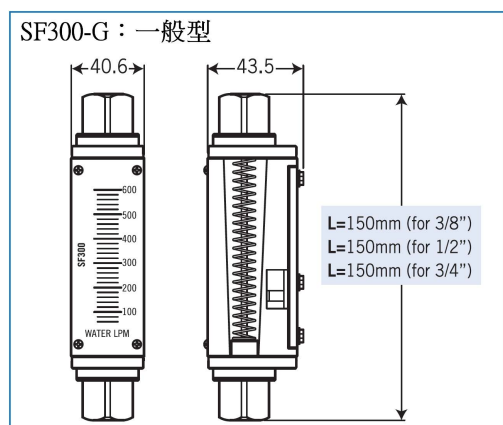

流體流向



型號選擇

SF300	(1) 型式						
	G	一般型					
	F	固定型					
	(2) 流量範圍						
	LPM-Litter per Minute						
	GPM-Gallon us) per Minute)						
	A	1~4 LPM					
	B	2~10 LPM					
	C	2~20 LPM					
	D	3~30 LPM					
	E	4~40 LPM					
	F	5~50 LPM					
	G	6~60 LPM					
	H	0.2~1 GPM					
	I	0.5~2.5 GPM					
	J	0.5~5 GPM					
	K	0.8~8 GPM					
	L	1~10 GPM					
	M	1.3~13 GPM					
	N	1.5~15 GPM					
	(3) 警報開關(A 接點 N.O.)						
	1R	單設定點					
2R	雙設定點						
0	無警報						
(4) 本體材質							
PC	Polycarbonate						
PUS	Polysulfone						
(5) 接口材質							
1	SS316						
(6) 接口尺寸							
A	3/8" NPT						
B	1/2" NPT						
C	3/4" NPT						
(7) 流向							
BT	底進頂出						
TB	頂進底出						
RL	右進左出						
LR	左進右出						
SF300	(1)	(2)	(3)	(4)	(5)	(6)	(7)
範例: SF300-G-C-0-PC-1-B-LR							