


面積式流量計 壓克力本體

型號: FBC

- ◆ 適用流體：空氣；水
- ◆ 材質：本體 — 壓克力塑膠
 - O 環 — NBR(標準)；Viton(可指定)
 - 浮球 — 不銹鋼 SS316；玻璃；POM 塑材
 - 接口 — SS316
 - 針閥 — SS316
- ◆ 接續口徑：1/8"NPT 母牙
- ◆ 操作壓力：max.10 kg/cm² at 38°C
- ◆ 操作溫度：-24°C ~ +54°C
- ◆ 精確度：全刻度的 3%
- ◆ 流向：背面下方進 背面上方出
- ◆ 重量：0.12 kg



外觀尺寸

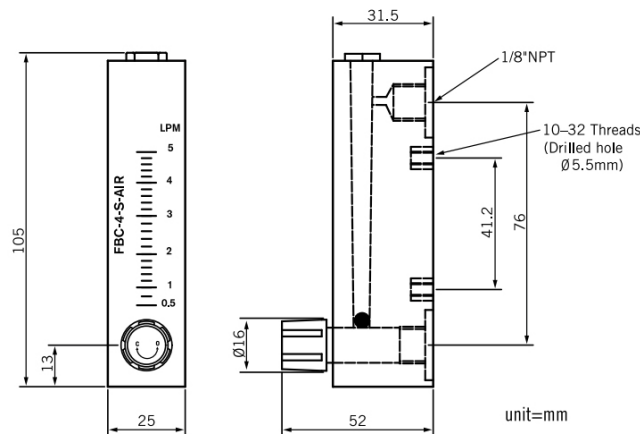

流體：水

編號	刻度範圍	流量單位	浮球材質	訂購編號
1	5-50	cc/min. cc per minute	SS316	FBC-V-S-W-50-C
2	10-100	cc/min. cc per minute	SS316	FBC-V-S-W-100-C
3	25-250	cc/min. cc per minute	SS316	FBC-V-S-W-250-C
4	100-1000	cc/min. cc per minute	SS316	FBC-V-S-W-1000-C
5	0.1-1	LPH, litter per hour	Plastic	FBC-V-P-W-1-LH
6	0.5-5	LPH, litter per hour	SS316	FBC-V-S-W-5-LH
7	1.5-15	LPH, litter per hour	SS316	FBC-V-S-W-15-LH
8	3-30	LPH, litter per hour	SS316	FBC-V-S-W-30-LH
9	6-60	LPH, litter per hour	SS316	FBC-V-S-W-60-LH
10	10-100	LPH, litter per hour	SS316	FBC-V-S-W-100-LH
11	1.5-15	GPH, gallon per hour	SS316	FBC-V-S-W-15-GH
12	2.5-25	GPH, gallon per hour	SS316	FBC-V-S-W-25-GH

※若不裝針閥，訂購編號中的“V”改為“N”

面積式流量計 壓克力本體

型號: FBC

流體：空氣

編號	刻度範圍	流量單位	浮球材質	訂購編號
1	60-300	cc/min. cc per minute	Plastic	FBC-V-P-A-300-C
2	80-450	cc/min. cc per minute	Glass	FBC-V-G-A-450-C
3	100-1000	cc/min. cc per minute	Glass	FBC-V-G-A-1000-C
4	0.1~1	LPM, litter per minut	Glass	FBC-V-G-A-1-LM
5	0.2~2	LPM, litter per minut	SS316	FBC-V-S-A-2-LM
6	0.5~5	LPM, litter per minut	SS316	FBC-V-S-A-5-LM
7	1~10	LPM, litter per minut	SS316	FBC-V-S-A-10-LM
8	2~20	LPM, litter per minut	Plastic	FBC-V-P-A-20-LM
9	2.5~25	LPM, litter per minut	SS316	FBC-V-S-A-25-LM
10	4~40	LPM, litter per minut	SS316	FBC-V-S-A-40-LM
11	5~50	LPM, litter per minut	SS316	FBC-V-S-A-50-LM
12	8~80	LPM, litter per minut	SS316	FBC-V-S-A-80-LM
13	10~100	LPM, litter per minut	SS316	FBC-V-S-A-100-LM
14	10-100	LPH, litter per hour	SS316	FBC-V-S-A-100-LH
15	20-200	LPH, litter per hour	Plastic	FBC-V-P-A-200-LH
16	30-300	LPH, litter per hour	SS316	FBC-V-S-A-300-LH
17	50-500	LPH, litter per hour	SS316	FBC-V-S-A-500-LH
18	60-600	LPH, litter per hour	SS316	FBC-V-S-A-600-LH
19	80-800	LPH, litter per hour	SS316	FBC-V-S-A-800-LH
20	0.15-1.5	NM ³ /H, normal cubic meter per hour	SS316	FBC-V-S-A-1.5-MH
21	0.3-3	NM ³ /H, normal cubic meter per hour	SS316	FBC-V-S-A-3-MH
22	0.6-6	NM ³ /H, normal cubic meter per hour	SS316	FBC-V-S-A-6-MH
23	0.3-3	SCFH, standard cubic feet per hour	SS316	FBC-V-S-A-3-SH
24	0.6-6	SCFH, standard cubic feet per hour	Plastic	FBC-V-S-A-6-SH
25	1-10	SCFH, standard cubic feet per hour	Plastic	FBC-V-P-A-10-SH
26	2-20	SCFH, standard cubic feet per hour	SS316	FBC-V-S-A-20-SH
27	5-50	SCFH, standard cubic feet per hour	SS316	FBC-V-S-A-50-SH
28	16-160	SCFH, standard cubic feet per hour	SS316	FBC-V-S-A-160-SH
29	20-200	SCFH, standard cubic feet per hour	SS316	FBC-V-S-A-200-SH

※若不裝針閥, 訂購編號中的“V”改為“N”

流體：特殊氣體

編號	刻度範圍	流量單位	浮球材質	訂購編號
1	0.02-0.2	LPM, litter per minut, O ₂	Plastic	FBC-V-P-A-0.2-LM
2	20-150	SCFH, standard cubic feet per hour, NH ₃	Plastic	FBC-V-P-A-150-SH

※若不裝針閥, 訂購編號中的“V”改為“N”